


Commercial Line

Technical Data

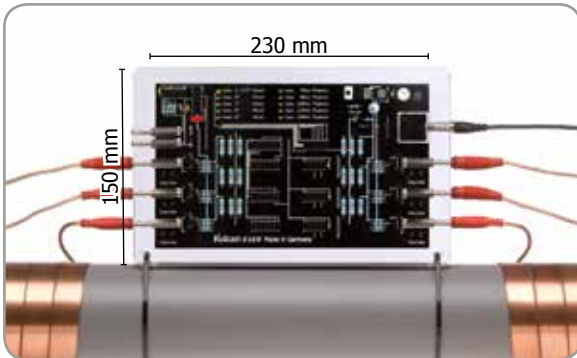

Vulcan S100

| | |
|---|--------------------------------------|
| Maximum capacity | 120 m ³ /h (530 gpm) |
| Maximum pipe diameter | 6" 150 mm |
| Voltage | 24 Volt |
| Wattage | 2.5 Watt |
| Impulse cable Band width | 6 x 4 m (6 x 13' 2") 20 mm (0.8") |
| Measurements (electronic unit) | 230/150/40 mm 9.1"/5.9"/1.6" |
| Frequency range | 3-32 kHz |
| Required space | 1200 mm 47" |
| Programs | 10 |
| Electronic Switching power supply unit | |
| In | 87-260 Volt 50-60 Hz |
| Out | 24 Volt 600 mA |

Scope of delivery

- 1 Vulcan S100 electronic unit
- 6 Vulcan Impulse bands
- 1 Power supply
- 16 Cable clips
- 1 Product brochure
- 1 Warranty card

Shipping Measurements (gross)

| | | |
|--------------------|----------------------------|-----------------------------------|
| Single unit | 52 x 43 x 15 cm 5.3 kg | 20.5" x 16.9" x 5.9" 11.7 lbs |
| Box of 2 | 67 x 40 x 49 cm 13.0 kg | 26.4" x 15.7" x 19.3" 28.7 lbs |
| Box of 4 | 70 x 60 x 49 cm 23.0 kg | 27.6" x 23.6" x 19.3" 50.7 lbs |

