


Commercial Line

Technical Data

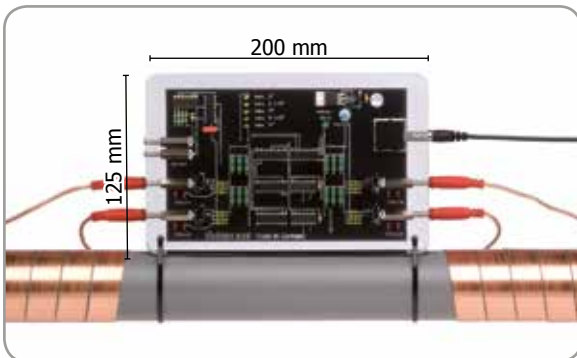

Vulcan S50

| | |
|--------------------------------|--------------------------------------|
| Maximum capacity | 70 m ³ /h (300 gpm) |
| Maximum pipe diameter | 5" 125 mm |
| Voltage | 24 Volt |
| Wattage | 2.25 Watt |
| Impulse cable Band width | 4 x 4 m (4 x 13' 2") 20 mm (0.8") |
| Measurements (electronic unit) | 200/125/40 mm 7.9"/4.9"/1.6" |
| Frequency range | 3-32 kHz |
| Required space | 900 mm 35" |
| Programs | 5 |

Electronic Switching power supply unit

| | |
|-----|-------------------------|
| In | 87-260 Volt 50-60 Hz |
| Out | 24 Volt 600 mA |

Scope of delivery

- 1 Vulcan S50 electronic unit
- 4 Vulcan Impulse bands
- 1 Power supply
- 10 Cable clips
- 1 Product information brochure
- 1 Warranty card

Shipping Measurements (gross)

| | | |
|--------------------|----------------------------|-----------------------------------|
| Single unit | 52 x 43 x 15 cm 4.0 kg | 20.5" x 16.9" x 5.9" 8.8 lbs |
| Box of 2 | 67 x 40 x 49 cm 9.5 kg | 26.4" x 15.7" x 19.3" 20.9 lbs |
| Box of 4 | 70 x 60 x 49 cm 18.0 kg | 27.6" x 23.6" x 19.3" 39.7 lbs |

